




# Complete balanced PTO Assemblies

1. Complete balanced PTO shaft assemblies.
2. Proven design for the propane and fuel delivery industry.
3. Improve uptime: Service with a limited number of “ready to install” sku’s.
4. Shafts designed to accommodate flexible PTO shielding.




For detailed information please refer to our electronic catalog: [www.neapco.mycarparts.net](http://www.neapco.mycarparts.net)

DL Series	Driveshaft Style <i>See Next Page</i>	B Tube Size	A Max Extended Length	A Com-pressed Length	Application Fitment	Maximum RPM	Part Number
1000	Welded-15	2.000X.083	41.00	28.00	1.25 Yoke / 1.125 Yoke	1000	UTS10-232398
1000	Welded-15	2.000X.083	59.00	39.00	1.25 Yoke / 1.125 Yoke	1000	UTS10-233498
1000	Welded-15	2.000X.083	59.00	39.00	1.00 Yoke / 1.250 Yoke	1000	UTS10-2334EH
1000	Welded-15	2.000X.083	72.00	52.00	1.25 Yoke / 1.125 Yoke	1000	UTS10-235298
1000	Welded-16	2.000X.083	56.50	36.50	1.00 Stub / 1.125 Yoke	1000	UTS10-984099

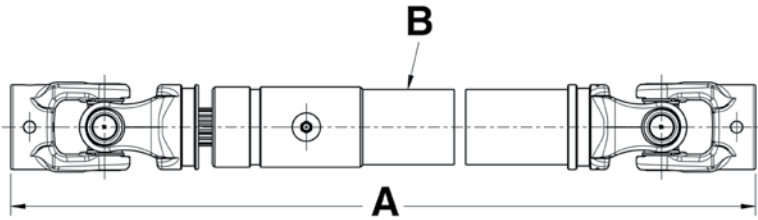

Type 15

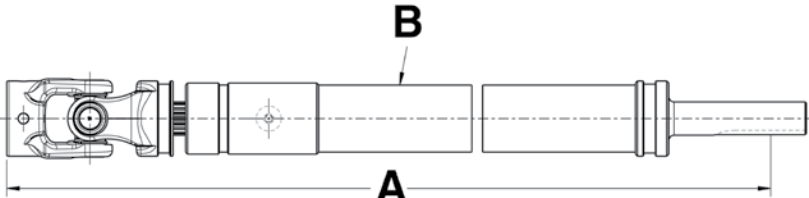

Type 16

# PTO Shield Kits

***Rotating driveline contact can cause death! A PTO safety shield is the least expensive insurance you can buy. The time spent to install and maintain a PTO shield could save a life!***

Part Number	Compressed Length	Maximum Extended Length
68-1001	34	54
68-1072	47	67



[www.neapco.com](http://www.neapco.com)

1-800-821-2374 toll-free

610-326-3857 fax

[hd@neapco.com](mailto:hd@neapco.com) email

092015

©2015 NEAPCO

9901367

